




詠冠群企業有限公司

IUNG GUAN CHIUN ENTERPRISE CO., LTD.

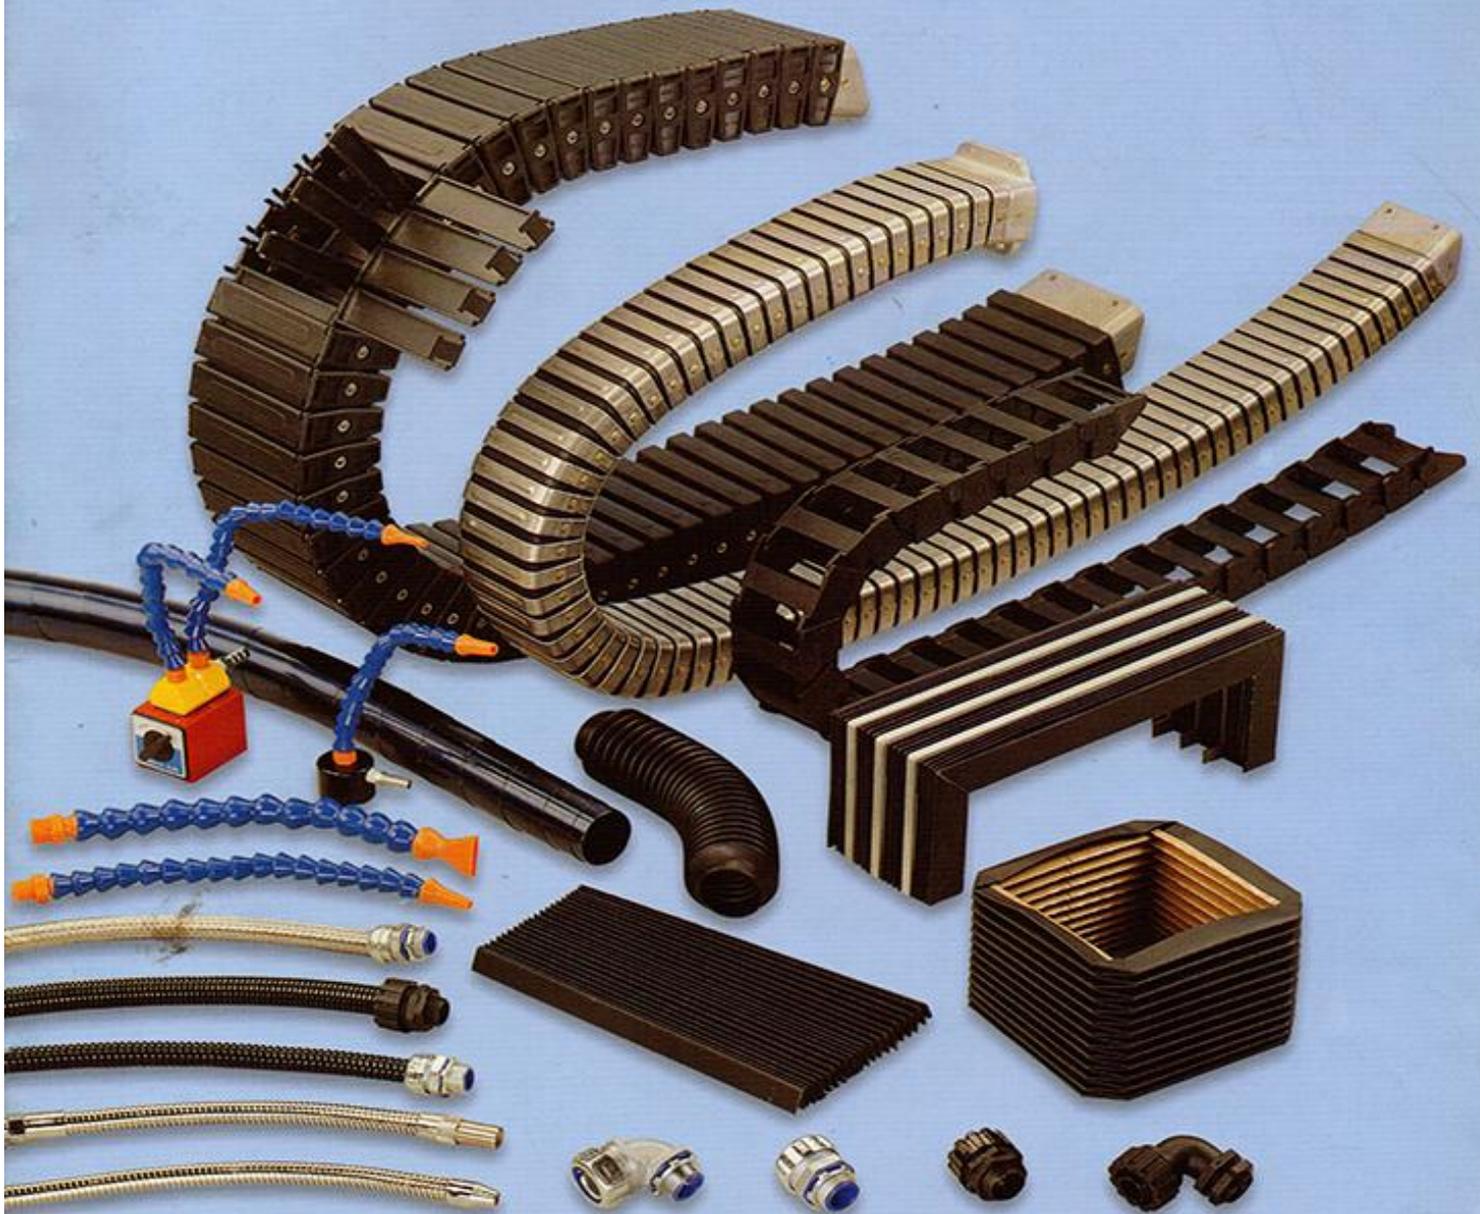


[生產項目]

方型游動護管 · 塑膠鍊條 · 電線保護管 · 保護管接頭
防塵摺套 · 伸縮捲皮 · 伸縮護蓋
銑床用擋屑皮 · 螺桿保護套 · 噴油管

● 方型游動保護管SUS#304+塑鋼
FLXIBLE CARRIER

TYPE CF
CB

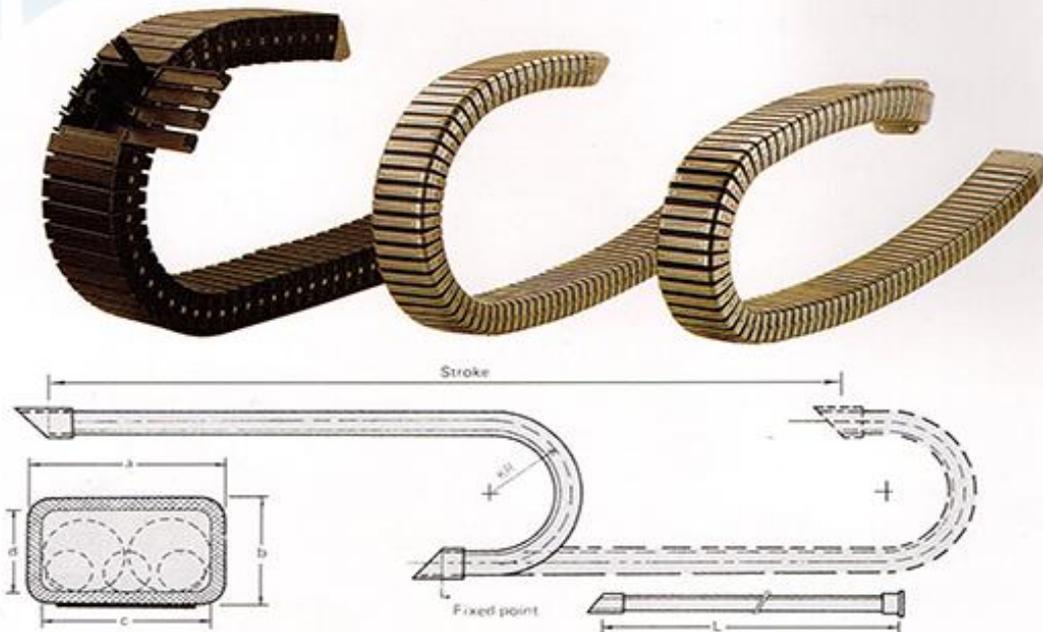

材質分：

不銹鋼+塑鋼
TYPE CF

塑鋼
TYPE CB

二種可供選用。
註：()部份為TYPE CB外觀的尺寸

型號 TYPE	尺寸表 Dimension (approx) mm					彎曲半徑KR(mm±10%)			
	外寬A	外高B	內寬C	內高D					
1	60	36	45	25	60				
2	90(100)	53(62)	74	40	100	150	200	250	
3	118(130)	67(74)	102	52	100	150	200	250	300
3.5	118	92	102	72	150				
4	182(190)	92(97)	162	72	150	250	350	450	

~Material: SUS304, Polyester

~Fastening: Flanges are welded to both ends of the flexible conduit to insure electricity Continuity.

~Length: The formula, to determine the length of what required, is 1/2" stroke plus 4 times bending radius plus 2" when the fixed connection is located at midpoint of stroke.

~Size: Selection: To determine interior size, a 10% allowance should be added to the outside diameter of the enclosed cables to prevent binding.

~Fitting: The type of A,B,S as picture on request.

~材質: SUS#304 不銹鋼+塑鋼, 塑鋼可開蓋。

~裝置: 兩只法蘭卸接於軟管兩端, 堅固耐用如圖A,B,S三種任選。


~長度: 固定點在中間: 全長=行程(STROKE)÷2+4KR(彎曲半徑)+50mm。

固定點在單邊: 全長=行程+4KR+50mm

~型式: 型式之選用以所需內容纜線外徑之和加10%欲度為宜。


~彎曲: 彎曲半徑之選取, 以內容纜線外徑之8~10倍為宜。

● 法蘭型式 FLANG TYPE

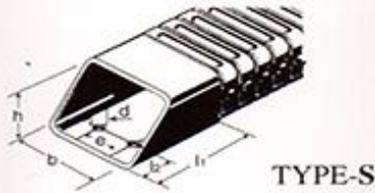


TYPE-S

TYPE-S	b	h	e	d	l1	l2
1	60	38	22	7	38	9
2	90	53	50	7	38	9
3	118	69	70	9	43	12
3.5	118	90	70	9	50	14
4	182	90	100	9	52	16

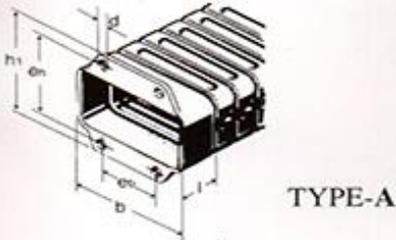

TYPE-A


TYPE-A	b	h1	eb	eh	d	l
1	60	70	18	55	7	25
2	90	85	45	70	7	25
3	118	110	60	90	9	25
3.5	118	130	60	110	9	30
4	182	145	95	110	9	30

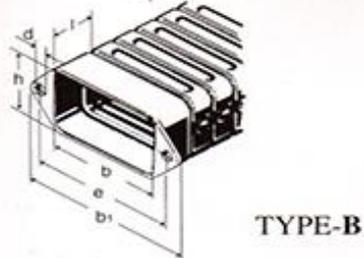

TYPE-B


TYPE-B	b	h	b1	e	d	l
1	60	35	90	75	7	25
2	90	51	122	105	7	25
3	118	66	160	140	9	25
3.5	118	90	167	145	9	30
4	182	90	225	200	9	30

● 法蘭裝置方法 CABLE FLANGE ARRANGEMENTS

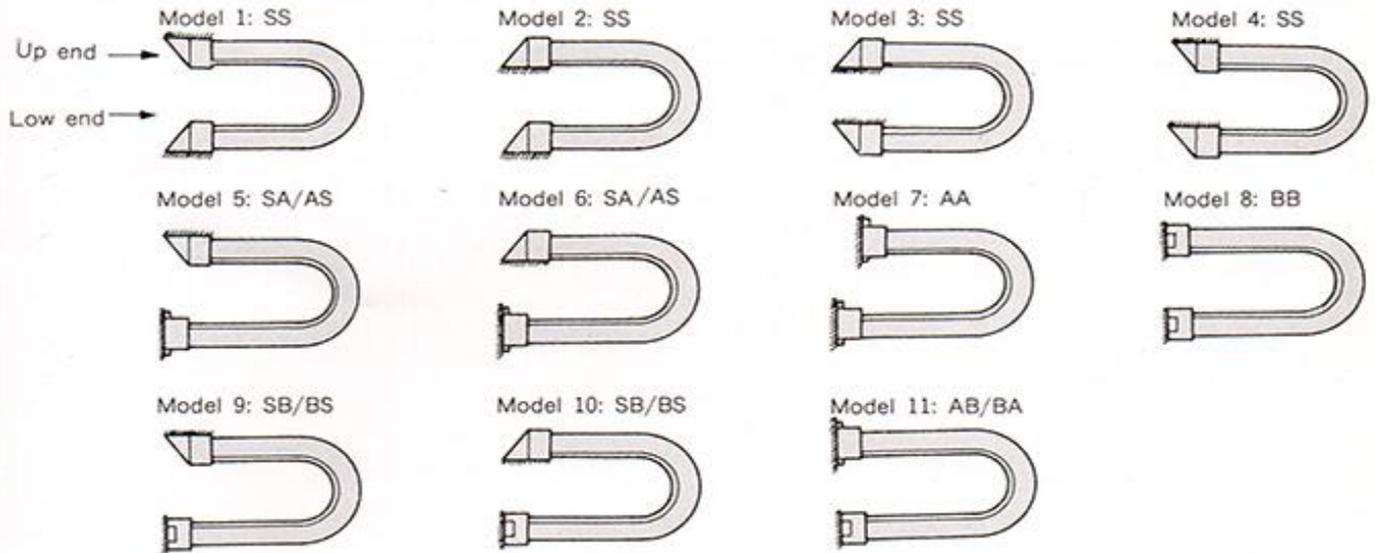


When ordering please quote: 訂製時請指明下列數據：

TYPE	彎曲半徑	總長度	裝配方法
2, 3, 3.5, 4	KR	L	NO
例：2xKR100x1500xNO.1			

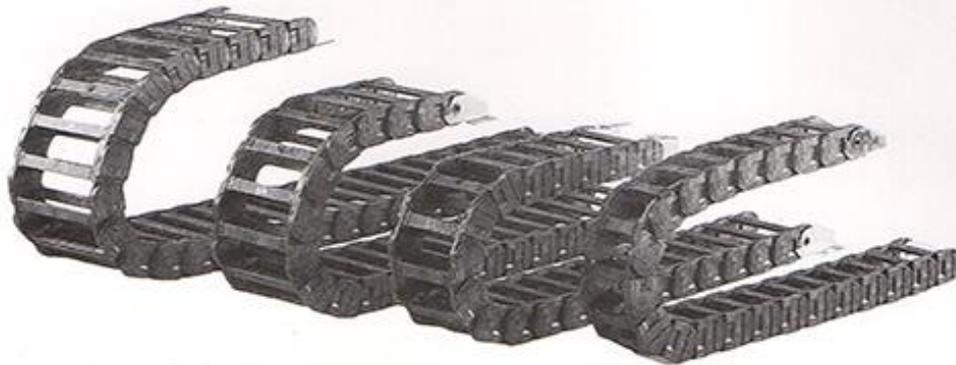

Model 型號	A 外寬	B 外高	C 內寬	D 內高	G 節距	KR 彎曲半徑
CK10010	17	13	10	10	18	18
CK10013	24	25	13	19	32	37
CK10024	35	27	24	18	32	37, 47, 77, 100
CK10038	54	40	38	24	32	52, 94, 125, 150
CK10058	74	40	58	24	45	52, 94, 125, 150, 200
CK10078	94	40	78	24	45	52, 94, 125, 150, 200
CK10065	93	62	65	34	62.5	90, 125, 200, 300
CK10108	136	62	108	34	62.5	90, 125, 200, 300
CK20080	116	84	80	55	92	160
CK20150	186	84	150	55	92	160
CK20200	236	84	200	55	92	160
CK20250	286	84	250	55	92	160
CK20300	336	84	300	55	92	160
CK20350	386	84	350	55	92	160
CK30060	100	72	60	50	80	120
CK30100	135	72	100	50	80	120
CK30150	178	72	150	50	80	120

● 塑膠鍊條固定夾 Chain Cable Mounting Bracket

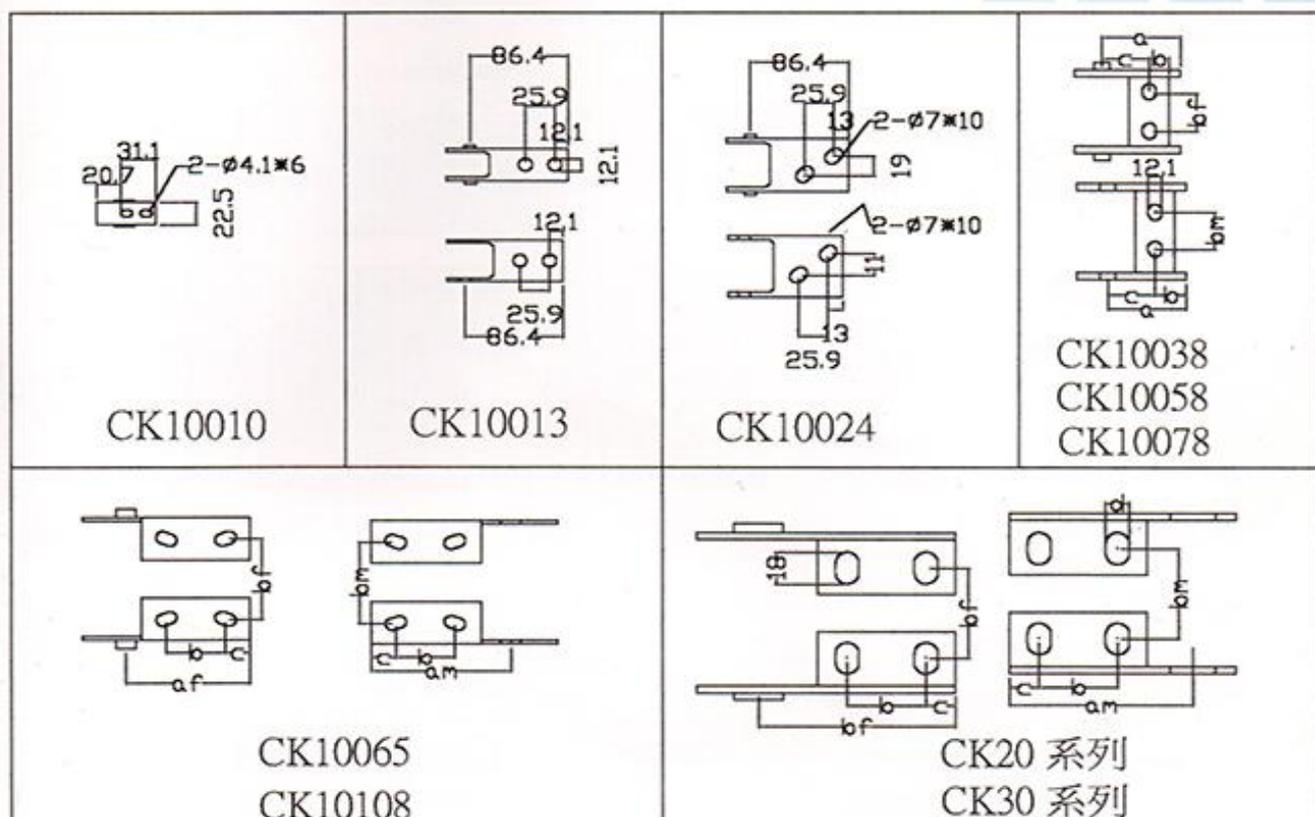

● 頭尾夾固定孔距表 Mounting Bracket Dimensions in mm

Model 型號	a	b	c	bf	bm	af	am	d
CK10038	40		25	22	25			7
CK10058	40		25	42	45			7
CK10078	40		25	62	65			7
CK10065		30	12.5	49	54	63	70	9
CK10108		30	12.5	92	97	63	70	9
CK20080		40	15	55	65	82	100	12
CK20150		40	15	125	135	82	100	12
CK20200		40	15	175	185	82	100	12
CK20250		40	15	225	235	82	100	12
CK20300		40	15	276	285	82	100	12
CK20350		40	15	325	335	82	100	12
CK30060		40	15	38	46	82	100	12
CK30100		40	15	78	86	82	100	12
CK30150		40	15	128	136	82	100	12

防水軟管 WAVED COVERED FLEXIBLE CONDUIT

TYPE A101



GALVANIZED SHEET CASING (鍍鋅鐵皮)



VINYL COVERING (PVC護套)

型號 Model	規格 Conduit Size	內徑(mm) Inner diameter		外徑(mm) Outer diameter		可動曲半徑(mm) Min bending radius (mm)	每捲長度(M) Length per roll (M)
		min	max	min	max		
A101003	3/8"	12.3	12.8	17.3	17.8	40	50
A101004	1/2"	15.5	16.0	20.5	21.0	50	50
A101006	3/4"	20.4	21.0	26.0	26.5	46	50
A101010	1"	26.0	26.7	32.5	33.0	90	50
A101012	1-1/4"	34.2	34.8	41.0	42.3	120	30
A101014	1-1/2"	40.0	40.6	47.5	48.8	160	25
A101020	2"	52.0	52.8	60.5	61.8	180	20
A101024	2-1/2"	62.3	63.0	72.5	74.0	230	10
A101030	3"	77.3	78.1	88.5	90.0	380	10
A101040	4"	100.2	101.2	108.0	110.0	410	10

金屬軟管 FLEXIBLE METAL CONDUIT

TYPE A102

GALVANIZED SHEET (鍍鋅鐵皮)



型號 Model	規格 Conduit Size	內徑(mm) Inner diameter		外徑(mm) Outer diameter		可動曲半徑(mm) Min bending radius (mm)	每捲長度(M) Length per roll (M)
		min	max	min	max		
A102003	3/8"	12.3	12.8	15.5	16.0	35	50
A102004	1/2"	15.5	16.0	19.5	20.2	40	50
A102006	3/4"	20.4	21.0	24.5	25.0	46	50
A102010	1"	26.0	26.7	30.3	31.0	50	50
A102012	1-1/4"	34.2	34.8	39.0	39.6	60	30
A102014	1-1/2"	40.0	40.6	45.0	45.6	95	25
A102020	2"	52.0	52.8	58.5	59.3	115	20
A102024	2-1/2"	62.3	63.0	70.5	71.2	140	10
A102030	3"	77.3	78.1	83.5	84.3	175	10
A102040	4"	100.2	101.2	106.5	107.5	225	10

● 防爆軟管 WIRE BRADING LIQUID TIGHT CONDUITS TYPE A103



型號 Model	規格 Conduit Size	內徑(mm) Inner diameter		外徑(mm) Outer diameter		可動曲半徑(mm) Min bending radius (mm)	每捲長度(M) Length per roll (M)
		min	max	min	max		
A104003	3/8"	12.3	12.8	18.5	19.0	60	50
A104004	1/2"	15.5	16.0	21.8	22.3	80	50
A104006	3/4"	20.4	21.0	27.2	27.7	95	50
A104010	1"	26.0	26.7	33.8	34.4	125	50
A104012	1-1/4"	34.2	34.8	42.6	43.2	150	30
A104014	1-1/2"	40.0	40.6	49.1	49.7	180	25
A104020	2"	52.0	52.8	61.2	61.8	205	20
A104024	2-1/2"	62.3	63.0	73.8	74.6	250	10
A104030	3"	77.3	78.1	89.8	90.6	290	10
A104040	4"	100.2	101.2	115.2	116.2	360	10

● 尼龍浪管 NALON TUBE TYPE A104




型號 Model	規格 Conduit Size	內徑(mm) Outer diameter	外徑(mm) Outer diameter	每捲長度(M) Length per roll (M)
A103003	3/8"	12.5	16.8	200
A103004	1/2"	16.7	21.0	100
A103006	3/4"	19.7	24.0	100
A103010	1"	28.7	33.7	100
A103012	1-1/4"	36.7	42.0	50

IUNG GUAN CHIUN

防水型盒接頭 BOX STRAIGHT LIQUID TIGHT CONNECTORS

型號	規格	Dimension (mm)					個數/每包
Model	Size	I.D	A	B	C	D	Packing pcs/bag
B101003	3/8"	11.0	26.0	38.0	12.5	20.9	50
B101004	1/2"	14.5	32.5	39.0	12.5	20.9	50
B101006	3/4"	19.5	41.0	43.0	14.3	26.4	50
B101010	1"	25.0	48.5	52.0	19.0	33.2	30
B101012	1-1/4"	33.0	56.5	60.0	20.6	41.9	20
B101014	1-1/2"	38.5	71.0	65.0	20.6	47.8	12
B101020	2"	49.5	87.0	78.5	22.2	59.6	10
B101024	2-1/2"	60.0	105.0	86.0	25.4	75.1	-
B101030	3"	75.5	124.0	100.0	25.4	87.8	-
B101040	4"	98.5	152.0	102.0	35.0	113.0	-


TYPE B101



防水L型接頭 BOX 90° LIQUID TIGHT CONNECTORS

型號	規格	Dimension (mm)					個數/每包
Model	Size	I.D	A	B	C	D	Packing pcs/bag
B102003	3/8"	11.0	26.0	34.9	12.5	20.9	50
B102004	1/2"	14.5	32.5	39.7	12.5	20.9	50
B102006	3/4"	19.5	41.0	44.4	14.3	26.4	50
B102010	1"	25.0	48.5	55.5	19.0	33.2	25
B102012	1-1/4"	33.0	56.5	69.8	20.6	41.9	12
B102014	1-1/2"	38.5	71.0	74.6	20.6	47.8	10
B102020	2"	49.5	87.0	87.3	22.2	59.6	5
B102024	2-1/2"	60.0	105.0	172.0	25.4	75.1	-
B102030	3"	75.5	124.0	200.0	25.4	87.8	-
B102040	4"	98.5	152.0	267.0	35.0	113.0	-


TYPE B102

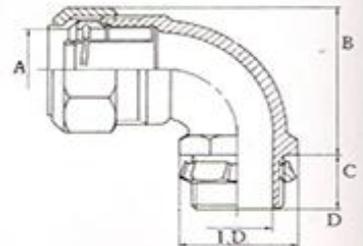

防水型管接頭—內牙型 COMBINATION COUPLINGS

型號	規格	Dimension (mm)					個數/每包
Model	Size	I.D	A	B	C	D	Packing pcs/bag
B104003	3/8"	11.0	26.0	38.0	12.5	20.9	50
B104004	1/2"	14.5	32.5	39.0	12.5	20.9	50
B104006	3/4"	19.5	41.0	43.0	14.3	26.4	50
B104010	1"	25.0	48.5	52.0	19.0	33.2	30
B104012	1-1/4"	33.0	56.5	60.0	20.6	41.9	20
B104014	1-1/2"	38.5	71.0	65.0	20.6	47.8	12
B104020	2"	49.5	87.0	78.5	22.2	59.6	10
B104024	2-1/2"	60.0	105.0	86.0	25.4	75.1	-
B104030	3"	75.5	124.0	100.0	25.4	87.8	-
B104040	4"	98.5	152.0	102.0	35.0	113.0	-


TYPE B104



● 防水型管接頭—EMT管用 COMBINATION COUPLINGS

型號 Model	規格 Size	Dimension (mm)					個數/每包 Packing pcs/bag
		I.D	A	B	C	D	
B105003	3/8"	11.0	26.0	38.0	12.5	19.6	50
B105004	1/2"	14.5	32.5	39.0	12.5	19.6	50
B105006	3/4"	19.5	41.0	43.0	14.3	25.9	50
B105010	1"	25.0	48.5	52.0	19.0	32.3	30
B105012	1-1/4"	33.0	56.5	60.0	20.6	38.6	20
B105014	1-1/2"	38.5	71.0	65.0	20.6	51.3	12
B105020	2"	49.5	87.0	78.5	22.2	64.2	10
B105024	2-1/2"	60.0	105.0	86.0	25.4	77.0	-
B105030	3"	75.5	124.0	100.0	25.4	90	-
B105040	4"	98.5	152.0	102.0	35.0	115	-


TYPE B105



● 牙圈 FERRULE

型號 Model	規格 Size	A	B	C	D	Packing pcs/bag
B106003	3/8"	11.3	19.4	10.3	18.7	100
B106004	1/2"	14.3	22.9	10.0	18.9	100
B106006	3/4"	19.3	28.4	10.9	20.2	100
B106010	1"	24.8	35.5	12.4	22.4	100
B106012	1-1/4"	33.0	44.8	16.5	30	50
B106014	1-1/2"	38.2	50.2	17.0	32.7	50
B106020	2"	49.8	63.0	18.8	37	50
B106024	2-1/2"	59.4	74.3	17.4	39	-
B106030	3"	75.5	91.6	19.6	47.2	-
B106040	4"	98.4	117.5	16.3	41.3	-

TYPE B106

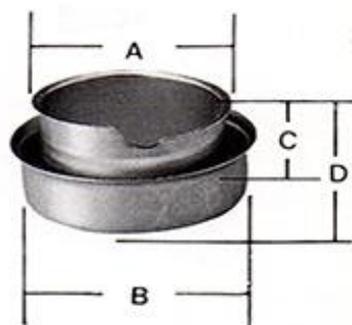

IUNG GUAN CHIUN

● 塑鋼防水盒接頭 POLYESTER LIQUID-TIGHT CONNECTORS

型號	規格	Dimension (mm)					個數/每包
		I.D	A	B	C	D	
Model	Size	I.D	A	B	C	D	Packing pcs/bag
B107003	3/8"	11.3	32.6	39.8	13.4	20.9	50
B107004	1/2"	14.4	36.1	40.3	13.4	20.9	50
B107006	3/4"	18.3	41.4	41.5	15.2	26.4	50
B107010	1"	24.4	50.1	47.2	19.7	33.1	30
B107012	1-1/4"	32.7	57.4	61.0	21.4	41.7	30

TYPE B107



● 塑鋼防水彎接頭 POLYESTER LIQUID-TIGHT CONNECTORS

型號	規格	Dimension (mm)					個數/每包
		I.D	A	B	C	D	
Model	Size	I.D	A	B	C	D	Packing pcs/bag
B108003	3/8"	11.3	32.6	54.8	13.4	20.9	50
B108004	1/2"	14.4	36.1	55.3	13.4	20.9	50
B108006	3/4"	18.3	41.4	59.5	15.2	26.4	50
B108010	1"	24.4	50.1	63.6	19.7	33.1	50
B108012	1-1/4"	32.7	57.4	97.4	21.4	41.7	30


TYPE B108



● 塑鋼牙圈 POLYESTER FERULE

型號	規格	Dimension (mm)				個數/每包
		I.D	A	B	C	
Model	Size	I.D	A	B	C	Packing pcs/bag
B109003	3/8"	11.3	20.7	18.8	8.0	50
B109004	1/2"	14.4	24.5	20.5	8.4	50
B109006	3/4"	18.3	28.8	24.6	10.3	50
B109010	1"	24.4	36.4	28.0	13.6	50
B109012	1-1/4"	32.7	45.6	35.7	15.5	30

TYPE B109



● 防塵摺套 SLIDEWAY GUARDS

防塵摺套

◎材質：尼龍耐熱布，透明PVC板貼合

◎功能：防塵，防油

*本產品屬訂製品，訂貨時請註明規格尺寸

Material: Nylon heat-resistant fabric glued transparent PVC ply



Function: Anti-dust, anti-oil

* This products is specially made by order, please specify size on orders.



A. 一字形防塵伸縮護套



B. 冂字形防塵伸縮護套

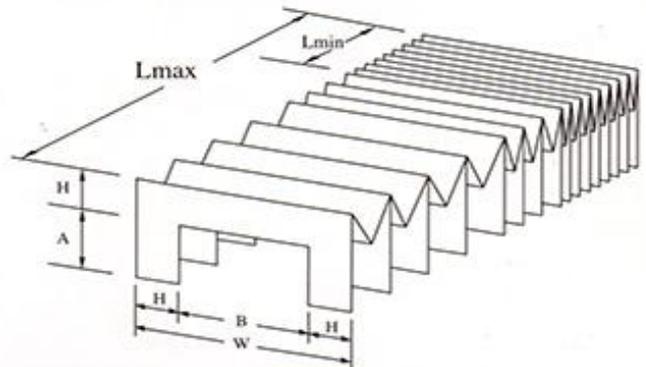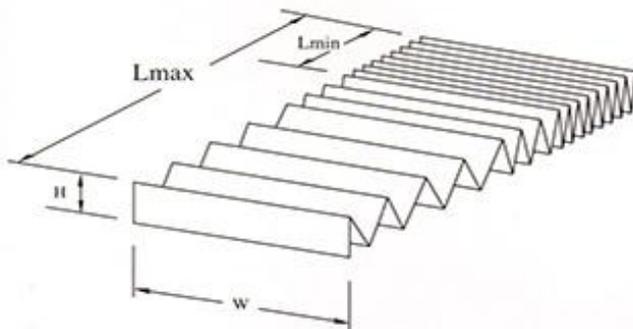

代號 樣式 (A, B)	A	B	H	W	Lmax	Lmin	備考

1. 請提供前後固定方式、尺寸

● 線性滑軌用防塵護套

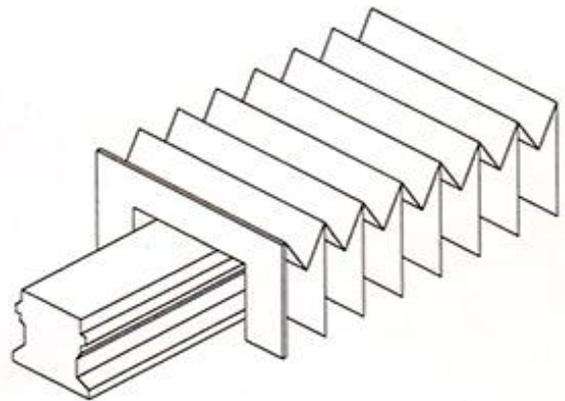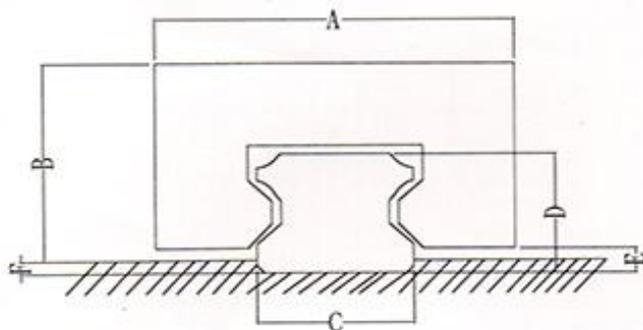

TYPE	滑軌編號	A	B	C	D	E	F	MAX	MIN
1									
2									


請提供滑軌廠牌規格、斷面圖及前後端固定板金方式及尺寸

IUNG GUAN CHIUN

伸縮捲皮 ROLL COVERS




TYPE DH

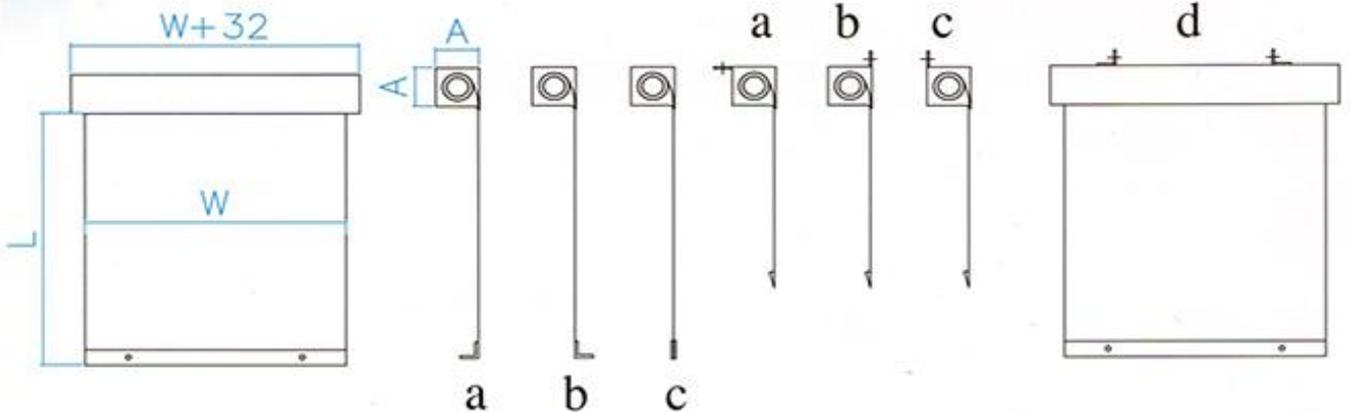

1. 伸縮捲皮尺寸 W: ___ L: ___
2. 縮捲器外長寬尺寸 A: ___
3. 捲皮固定方式 a: ___ b: ___ c: ___ [勾選]
4. 縮捲器安裝方式 a: ___ b: ___ c: ___ d: ___ [勾選]
5. 訂購數量: ___

TYPE DL

伸縮護蓋 TELESCOPIC COVERS

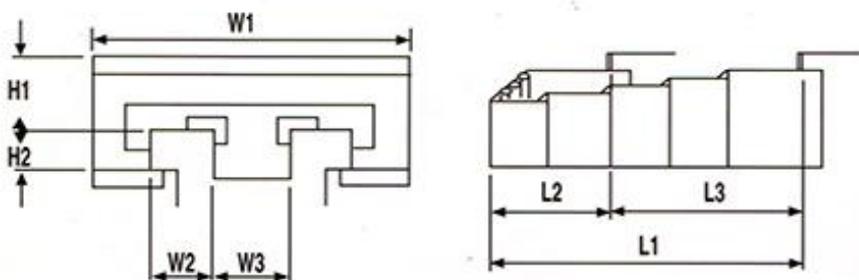

- | | | |
|------------|----------|---------------|
| W1: 滑台寬度 | L1: 最大長度 | H1: 滑軌面至滑台面高度 |
| W2: 滑軌寬度 | L2: 最小長度 | H2: 滑軌高度 |
| W3: 滑軌內側寬度 | L3: 行程長度 | |

● 銑床用擋屑板 WAY COVER FOR MILLING MACHINE TYPE DA

波浪型 WAVE TYPE	平面型 FLATE TYPE
W*L	W*L
380*330	370*750
380*450	400*750
500*500	450*850



材質：NBR耐油、耐熱橡膠

*特殊尺寸可另訂製

Material: NBR anti-oil

Heat-resistant urbber.


*Tailor special sizes

● 伸縮護套 BELLOWS TYPE DE

Size	I.D	O.D	L.Max	L.Min
規格	內徑	外徑	最大長度	最小長度
25mm	25	45	350	55
30mm	30	50	600	100
40mm	40	60	450	60
50mm	50	70	500	70
60mm	60	95	600	80
70mm	70	90	300	40
80mm	80	110	650	80
100mm	100	126	250	30
130mm	130	160	300	40



● 伸縮套法蘭裝置方式

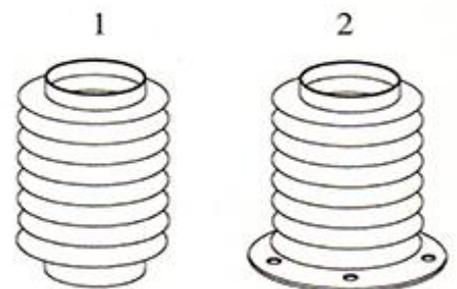

材質：NBR耐油、耐熱橡膠

長度可加長


*特殊尺寸可另訂製

Material: NBR anti-oil,heat-resistant rubber.

Length can be prolonged.


special sizes by tailor made.

*Tailor special sizes

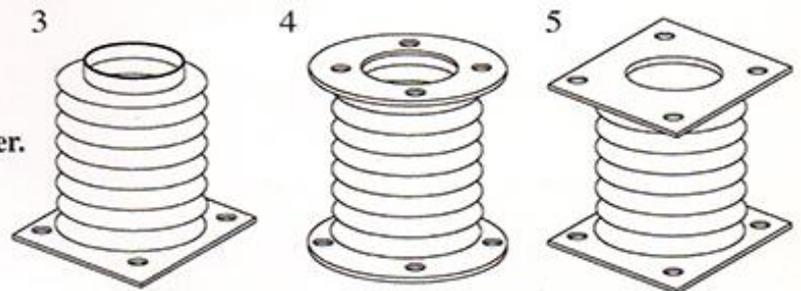


IUNG GUAN CHIUN

滾珠螺桿保護套 BALL SCREW PROTECTIVE CASING

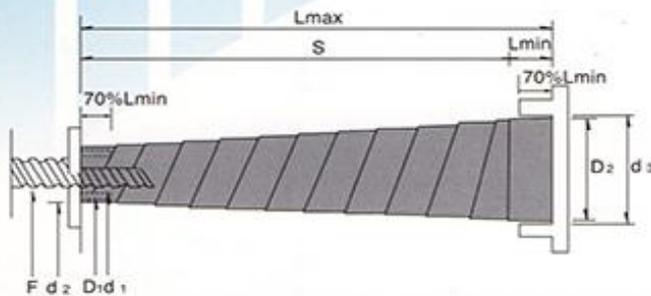

TYPE DF

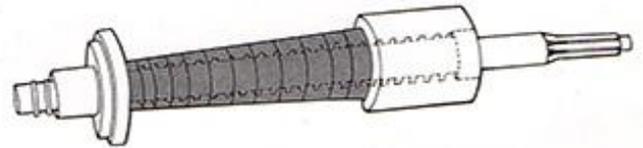

Size	d1	L.Max	S (stroke)	L.Min	D2± 1mm
規格	內徑	最大長度	行程	最小長度	外徑
40-750-50	40	750	700	50	73
40-750-60	40	750	690	60	68
40-900-60	40	900	840	60	72
40-1050-60	40	1050	990	60	78
40-1200-100	40	1200	1100	100	72
40-1500-100	40	1500	1400	100	79
45-750-60	45	750	690	60	75
45-1000-100	45	1000	900	100	80
45-1200-100	45	1200	1100	100	84
45-1600-100	45	1600	1500	100	94
50-900-75	50	900	825	75	85
50-1100-100	50	1100	1100	100	78
50-1500-100	50	1500	1400	100	87

適用功能:

滾珠螺桿, 導螺桿, 油壓缸, 氣壓缸, 精密模座徹底防止鐵屑, 飛塵及雜物進入

材料:

SK-5 進口鋼料

符號說明:

F: 滾珠螺桿外徑
 D1: 內襯套外徑
 d1: 內襯套內徑
 D2: 保護套外徑
 d2: 保護套內徑
 d3: 外襯套內徑
 S: 伸縮長度
 Lmax: 最大伸展長度
 Lmin: 最小壓縮長度

APPLICATIONS:

Ball screw, lead screw, hydraulic cylinder, pneumatic cylinder, precise mold base. Completely prevent scraps, flying dust, & impurities form entering.

MATERIAL:

Imported steel belt SK-5

Symble Statement:

F: Ball screw outer dia.
 D1: Inner bushing outer dia.
 d1: Inner bushing internal dir.
 D2: Protective casing outer dia.
 d2: Protective casing internal dia.
 d3: External bushing internal dia.
 S: Strectch length.
 Lmax: Max.strectch length.
 Lmin: Min.compression length.

● 塑鋼噴油管 PLASTIC COOLANT TUBES

Model 型號	Size 規格	圓噴咀尺寸	扁噴咀尺寸
E10220P	1/4"*12"	3mm, 6mm	10mm, 25mm
E10317P	3/8"*12"	6mm, 9mm	32mm, 64mm
E10412P	1/2"*12"	6mm, 9mm, 12mm	32mm, 64mm
E102000	1/4"考克		
E103000	3/8"考克		
E104000	1/2"考克		
E300001	1/4"單孔磁座		
E300002	1/4"雙孔座		
E300003	1/4"雙孔ON/OFF磁性座		

TYPE E102



*特殊尺寸可另訂製


*Tailor special sizes

● 金屬噴油管 COOLANT TUBES

Model 型號	Size 規格	Length 長度
E202000	1/4"	13", 14", 16", 18", 20", 24"
E203000	3/8"	14", 16", 18", 20", 24", 30"




TYPE E202



TYPE E203

● EDM防火管 EDM FIXED TUBES


Model 型號	Size 規格
F103012	3/8"*12"
F103016	3/8"*16"
F103020	3/8"*20"
F103024	3/8"*24"
F103030	3/8"*30"




TYPE F103

機械配件製造銷售

We Manufacture and Export Machine Parts and Accessories

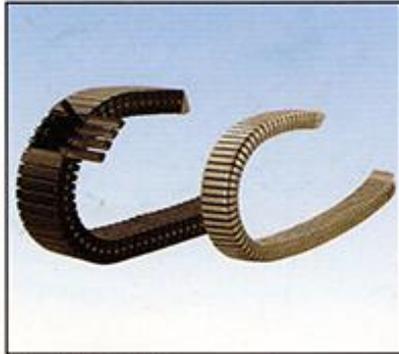


方型游動護管
Flexible Carrier

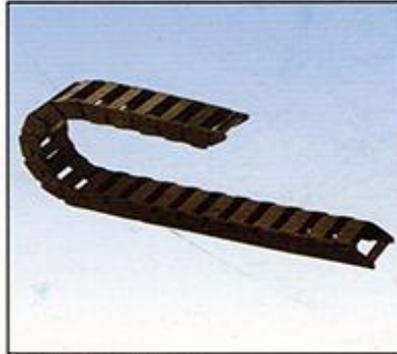


開放式塑膠鍊條
Cable Chain




電線保護管, 保護管接頭
Liquid-Tight Flexible Conduits,
Flexible Conduit Connector

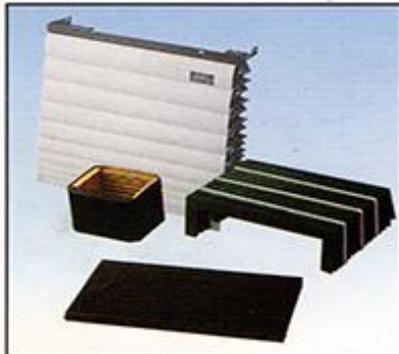


防塵摺套
Slideway Guards

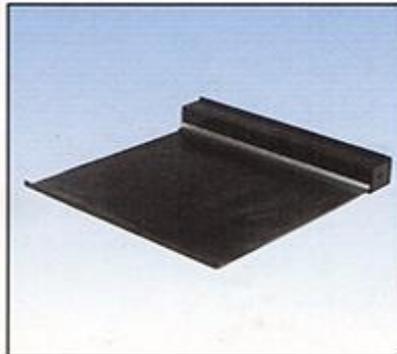


伸縮捲皮
Roll Covers

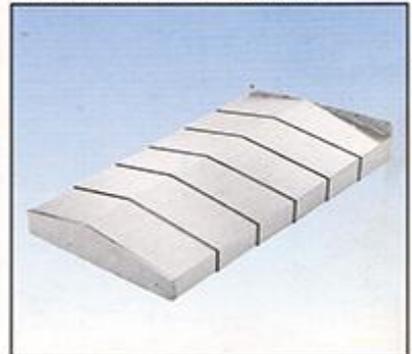

伸縮護蓋
Telescopic Covers

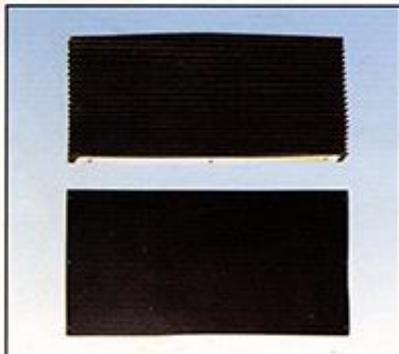

銑床用擋屑板
Way Cover for Milling Machine

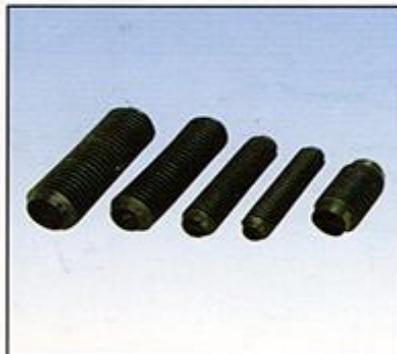

伸縮護套, 螺桿保護套
Bellows,
Ball Screw Protective cas



噴油管
Oil Spraying Pipes

詠冠群企業有限公司

IUNG GUAN CHIUN ENTERPRISE CO., LTD.

台中市南區美村南路 39 巷 16 號

Tel: 04-22652955

Fax: 04-22609679